



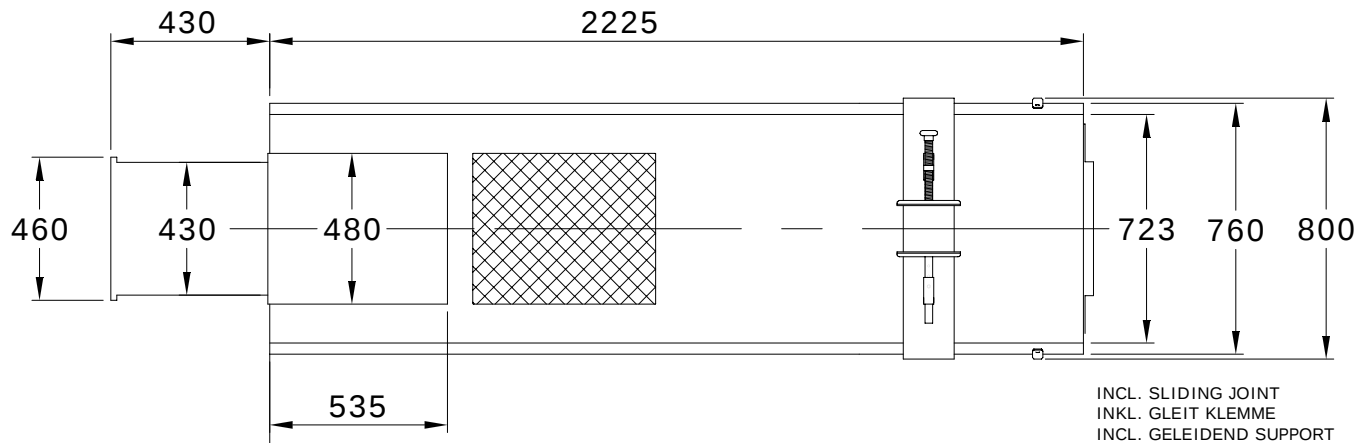

Drive-on direction
Fahrriichtung
Rijrichting

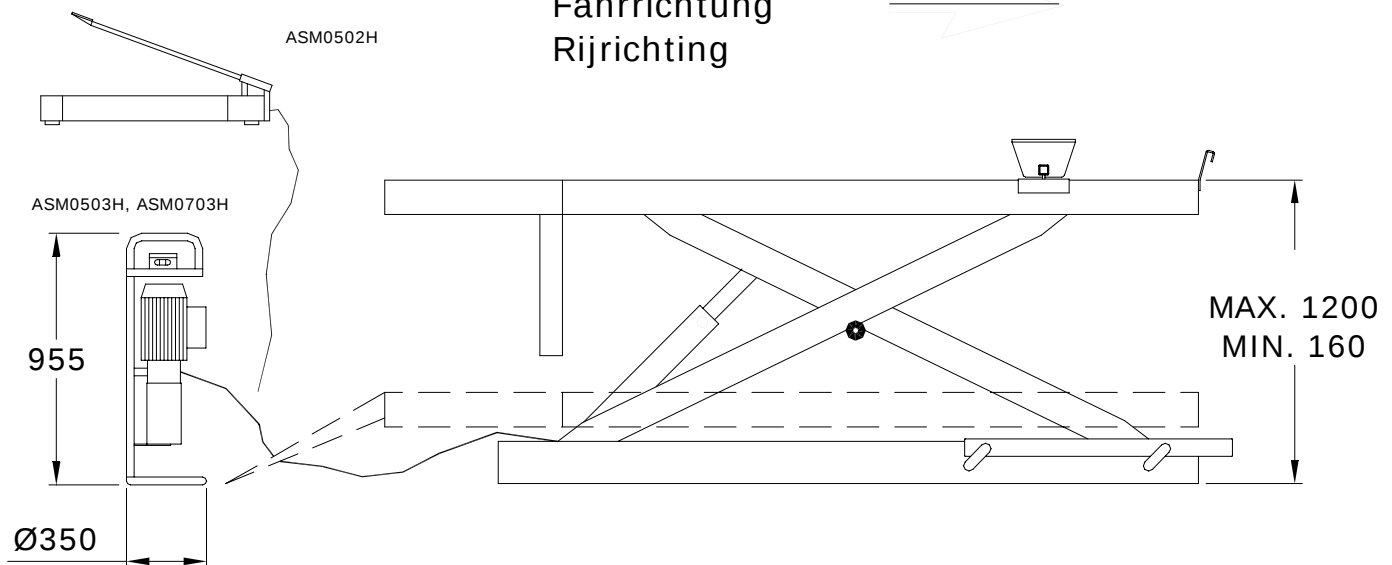


Accessories / Zubehör / Accessoires:

Small scissor lift
Mini-Hebebühne
Minikrik



BA-A1/ASM

Side support
Supportplate für Standard
Support voor zijstandaard

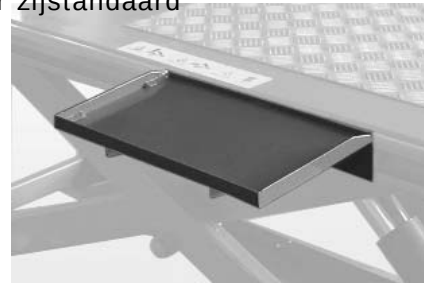


BA-A2/ASM3

Set table-width 2x150 mm
Satz tischverbreitung 2x150 mm
Set heftafel verbreding 2x150 mm



BA-A2/ASM4

Set table-width 2x300 mm
Satz tischverbreitung 2x300 mm
Set heftafel verbreding 2x300 mm

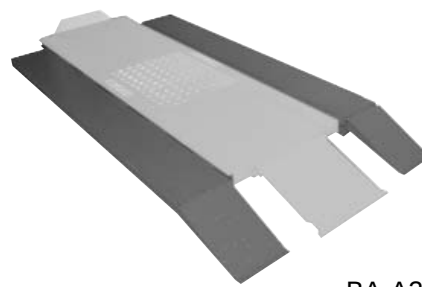


BA-A2/ASM5

Technical specifications / Technische Spezifikationen / Technische specificaties:


			ASM0502H		ASM0703H
Capacity	Tragfähigkeit	Hefvermogen	500 kg		700 kg
Lifting time	Hebezeit	Heftijd	Variable/Variabel/Variabel		15 s
Descent time	Absenkzeit	Daaltijd	Variable/Variabel/Variabel		15 s
Noise level	Lärmpegel	Geluidsniveau			70 dB (A) / 1 m
Working temp.	Arbeitstemp.	Werktemp.	-10 °C / + 40 °C		-10 °C / + 40 °C
Working enviro.	Arbeitsumgeb.	Werkomgeving	Indoor/Drinnen/Binnen		Indoor/Drinnen/Binnen
Motor power	Motorleistung	Motorvermogen			0,75 kW
Electr. Supply	Anschlußwert	Aansl. waarde			230 V / 50 Hz / 1 ph
Color	Farbe	Kleur	RAL 5015		RAL 5015
CE number	CE Nummer	CE nummer	M6 99 05 31172 004		M6 99 05 31172 004
Notified body	Notified body	Notified body	TÜV Product service		TÜV Product service

Packing/Verpackung/Verpakking:

Main part for all lifts

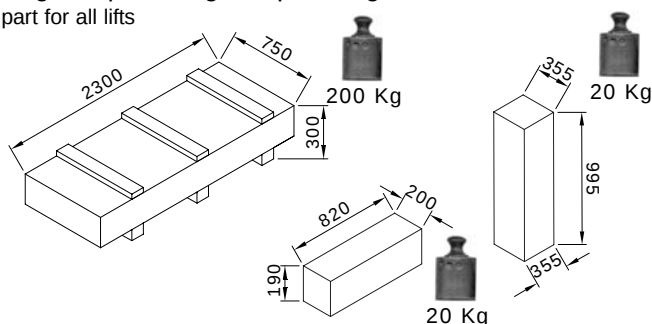

Container transport:



20 ft. = 54 pieces/Stück/stuks